
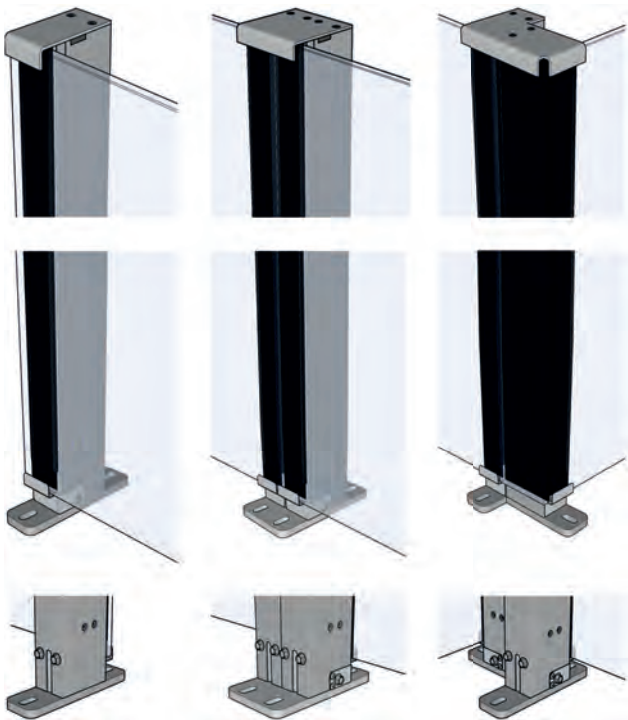


CiU® BalconyFixed

Product type Glass balustrade
Product family ClickitUp® Balcony

ErgoSafe®
FLEXIBLE GLASS SOLUTIONS

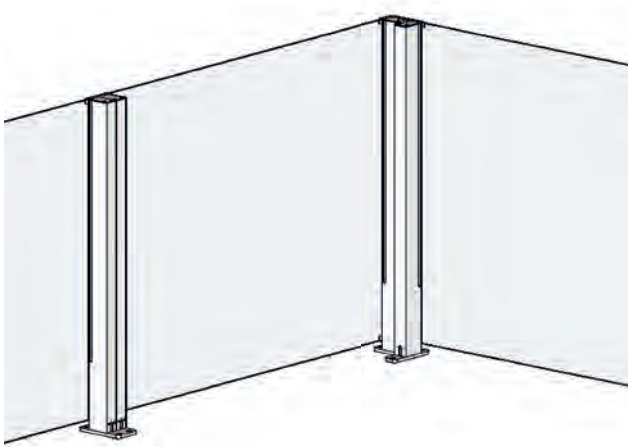

Description

Glass balustrade

Safety

ClickitUp® is tested according to EN 12600:2002

Manufacturing method

Structural glazing is used to fit the glass to the aluminium posts

Baseplate mounts

Baseplate mounts are available as single, double and corner variants.

Cover caps

Cover caps are available as single, double and corner variants.

Material

Glass, aluminium and stainless steel

Glass

Toughened laminate glass 8.76 mm

Height

1100 mm

Width measurement straight section

Max 1800 mm


Surface treatment

Natural anodised as standard. As an option and at an additional charge black anodised or powder coated finish in a RAL colour are available.

Installation



During installation the sections are linked together into a single system with the help of double cover caps and double baseplate mounts

CiU® BalconyFixed

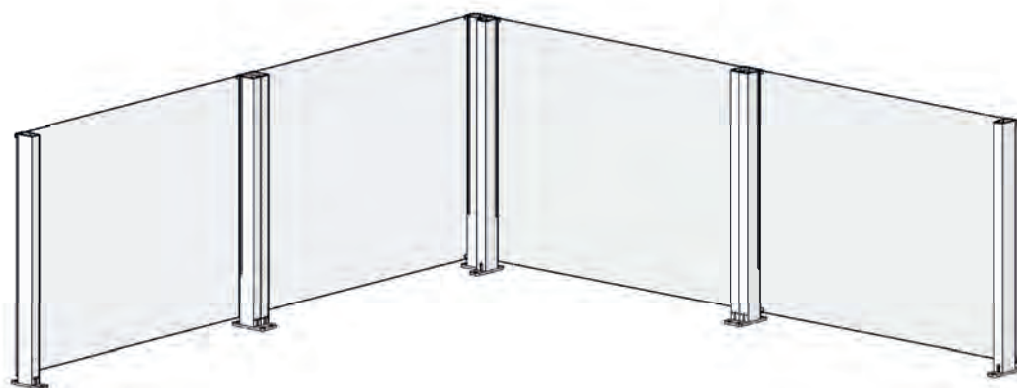

ClickitUp®
by ErgoSafe®

CiU BalconyFixed

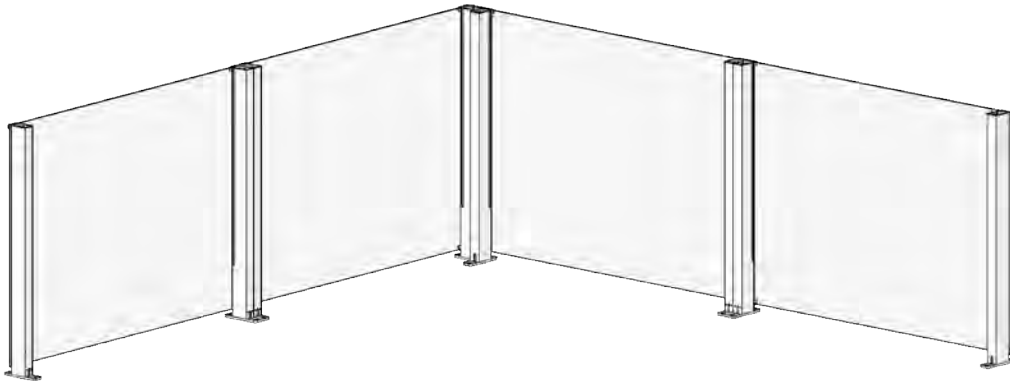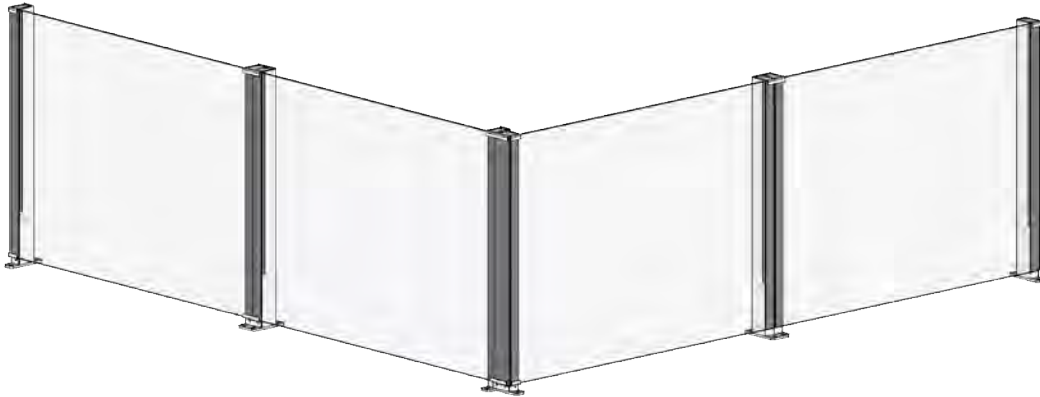

ClickitUp[®]
by ErgoSafe[®]